

# JIANGSU WUJIN KAILI ELECTRONIC FACTORY

## SPECIFICATION SHEET


ELECTRONIC SPECIFICATION:



### *HC-12G SERIES:*

Type	HC12G-1P	HC12G-2P	HC12G-3P
Rated Voltage (V)	1.5	1.5	3.5
Operating Voltage (V)	1~2	1~2	3.0~5.0
Rated Current (MA)	< 30	< 10	< 30
Coil Resistance (ohm)	16 ± 2	42 ± 6	42 ± 6
Coil Impedance (ohm)	40	140	140
Sound Output at 10cm (dB)	> 85	> 80	> 80
Resonant Frequency (Hz)	2048	2048	2048
Operating Temperature (C)	-25~+80	-25~+80	-25~+80
Storage Temperature (C)	-30~+85	-30~+85	-30~+85
Weight (g)	2	2	2

Value applying rated voltage (2048Hz, 1/2duty, square wave)  
Value applying(2048Hz, sine ware, measuring current 60 uA)

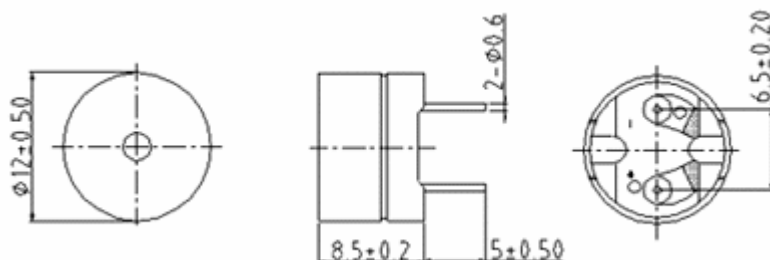

### JIANGSU WUJIN KAILI ELECTRONIC FACTORY

Miaoqiao Town, Changzhou city, Jiangsu, China 213167

TEL:0086-519-6462433; 6712320

FAX:0086-519-6471336; 6712320

E-mail: [kailiec@jsmail.com.cn](mailto:kailiec@jsmail.com.cn)

<http://www.kaili-buzzer.com/>