

# JIANGSU WUJIN KAILI ELECTRONIC FACTORY

## SPECIFICATION SHEET

ELECTRONIC SPECIFICATION:




**HCM09X SERIES:**

Type	HCM0901X	HCM0903X	HCM0905X
Rated Voltage (V)	1.5	3	5
Operating Voltage (V)	1.3~2	2~5	3~7
Rated Current (MA)	< 25	< 20	< 20
Sound Output at 10cm (dB)	> 75	> 75	> 80
Resonant Frequency (Hz)	2500 ±300	2500 ±300	2500 ±300
Response Time (ms)	< 50	< 50	< 50
Operating Temperature (C)	-10~+50	-25~+70	-25~+70
Storage Temperature (C)	-15~+60	-30~+80	-30~+80
Weight (g)	1	1	1

Value applying rated voltage (DC)

Value applying( Min. operational DC voltage )

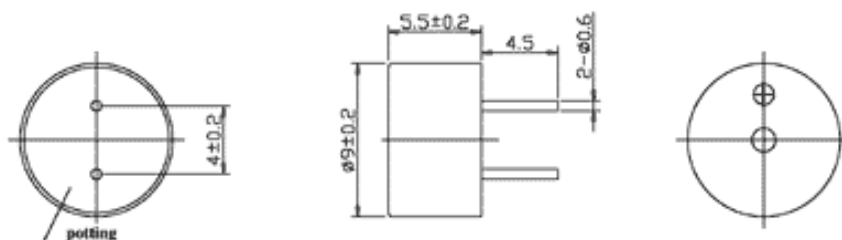

**JIANGSU WUJIN KAILI ELECTRONIC FACTORY**

Miaoqiao Town, Changzhou city, Jiangsu, China 213167

TEL: 0086-519-6462433; 6712320

FAX: 0086-519-6471336; 6712320

E-mail: [kailiec@jmail.com.cn](mailto:kailiec@jmail.com.cn)

<http://www.kaili-buzzer.com/>