

# JIANGSU WUJIN KAILI ELECTRONIC FACTORY

## SPECIFICATION SHEET

ELECTRONIC SPECIFICATION:




**HCM16A SERIES:**

Type	HCM1601A	HCM1606A	HCM1612A
Rated Voltage (V)	1.5	6	12
Operating Voltage (V)	1~2	4~8	9~15
Rated Current (MA)	< 12	< 40	< 40
Coil Resistance (ohm)	27 ± 3	42 ± 6	115 ±12
Coil Impedance (ohm)	80	140	200
Sound Output at 10cm (dB)	> 80	> 85	> 85
Resonant Frequency (Hz)	2048	2048	2048
Operating Temperature (C)	-25~+70	-25~+70	-25~+70
Storage Temperature (C)	-30~+85	-30~+85	-30~+8
Weight (g)	7	7	7

Value applying rated voltage (2048Hz,1/2duty,square ware)

Value applying(2048Hz,sine ware, measuring current 60 uA)

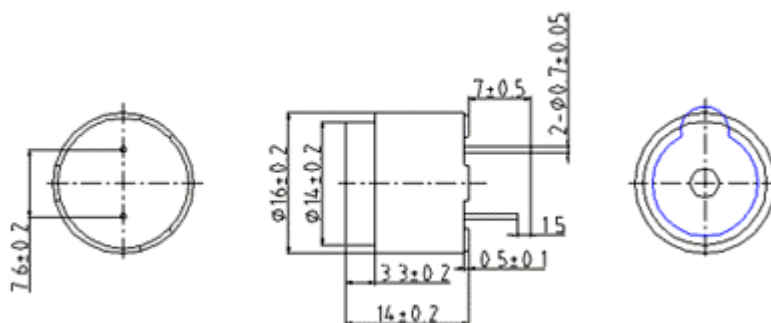

JIANGSU WUJIN KAILI ELECTRONIC FACTORY

Miaoqiao Town,Changzhou city,Jiangsu,China 213167

TEL:0086-519-6462433; 6712320

FAX:0086-519-6471336; 6712320

E-mail: [kailiec@jmail.com.cn](mailto:kailiec@jmail.com.cn)

<http://www.kaili-buzzer.com/>